


Impasto — Uf Select

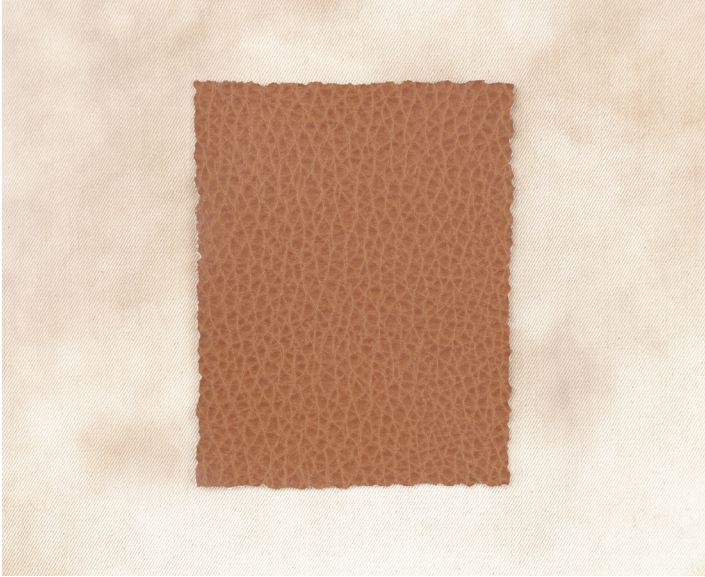

Featuring a textural quality reminiscent of layered paint on canvas, **Impasto** has a natural grain appearance that is exaggerated yet classic. A curated palette of 12 hues, including transitional shades of neutral and rich tones, enhance its textural presence and supple hand.

- 01** Impresses with its exaggerated, leather-like appearance
- 02** North American made
- 03** Polycarbonate blend provides excellent durability
- 04** 10 weeks hydrolysis resistance
- 05** 200,000 double rubs (Wyzenbeek), 150,000 rubs (Martindale)
- 06** Bleach cleanable (1:5 bleach/water solution)

Impasto — Uf Select

Application Interior Upholstery

General Specifications

Composition Polycarbonate Blended Surface | 65% Polyester, 35% Cotton Backing

Weight Approx. 12.53 oz. Per Square Yard | Approx. 425 Grams Per Square Metre

Thickness Approx. 0.95 Millimetres

Width 54 Inches | 137 Centimetres

Repeat None

Performance

Abrasion ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)* | BS EN ISO 12947-2 / 150,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis 10 Weeks | ASTM D3690 Sect. 6.11 (Hydrolytic Stability) | ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating ASTM D751

Tear Strength ASTM D2261

Breaking Strength ASTM D5034

Tensile Strength BS EN ISO 1421

Colorfastness

Light Fastness AATCC 16.3, 200 Hours, Grade 4 | ISO 105 B02, Grade 6

Crocking AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

ASTM E84 (Adhered) - Class A | CA TB 117 - Pass | FMVSS 302 & 95/28 Annex IV - Pass | NFPA 260 - Class 1 | UFAC - Class 1

For more information on our fabrics, cleaning and care instructions, please visit our website.