


Ultraleather Pro — Ultrafabrics

Ultraleather Pro is crafted with passion and purpose. Imbued with optimal durability, protection, and ease of care attributes, Ultraleather Pro maintains the Ultraleather reputation as the softest in its class and is infused with comfort and power combined. Added features include exceptional abrasion resistance, repellency of most stubborn stains like ink, denim dye, red wine, mustard, and iodine-based liquids, along with EPA-registered antimicrobial protection. An extensive color palette provides numerous options for upholstery applications.

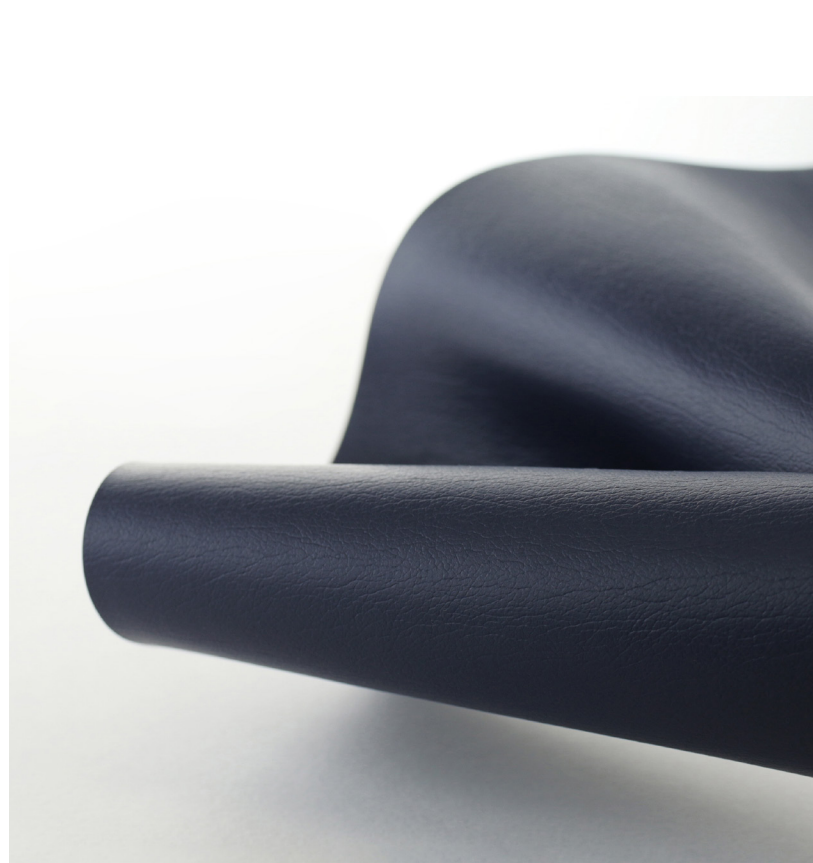

-
- Superior durability – industry-leading 14+ weeks hydrolysis results
 - Reinforced rayon backing
 - 500,000 double rubs (Wyzenbeek), 200,000 rubs (Martindale)
 - Bleach cleanable (1:5 bleach/water solution)
 - EPA-registered antimicrobial protection does not contain triclosan and triclocarban
 - SCS Indoor Advantage Gold Certification

An intelligent solution – the Ultrafabrics family of performance fabrics highlights boundary-pushing innovation where looks, feel and performance matter.



Antimicrobial



Ink & Stain Resistant

Ultraleather Pro from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface

100% Reinforced Rayon Backing

Weight:

Approx. 9.7 oz. Per Square Yard

Approx. 330 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 500,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 200,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Antimicrobial: ASTM E2180

Tensile Strength: BS EN ISO 1421

Colorfastness

Light Fastness: AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

Ultraleather Pro Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim*
- Red Wine

* Removal of denim dye may vary depending on the period of time the stain sets in. While Pro offers excellent protection, full removal is not guaranteed.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.

8/21

