


Ultraleather —  
**Ultrafabrics**





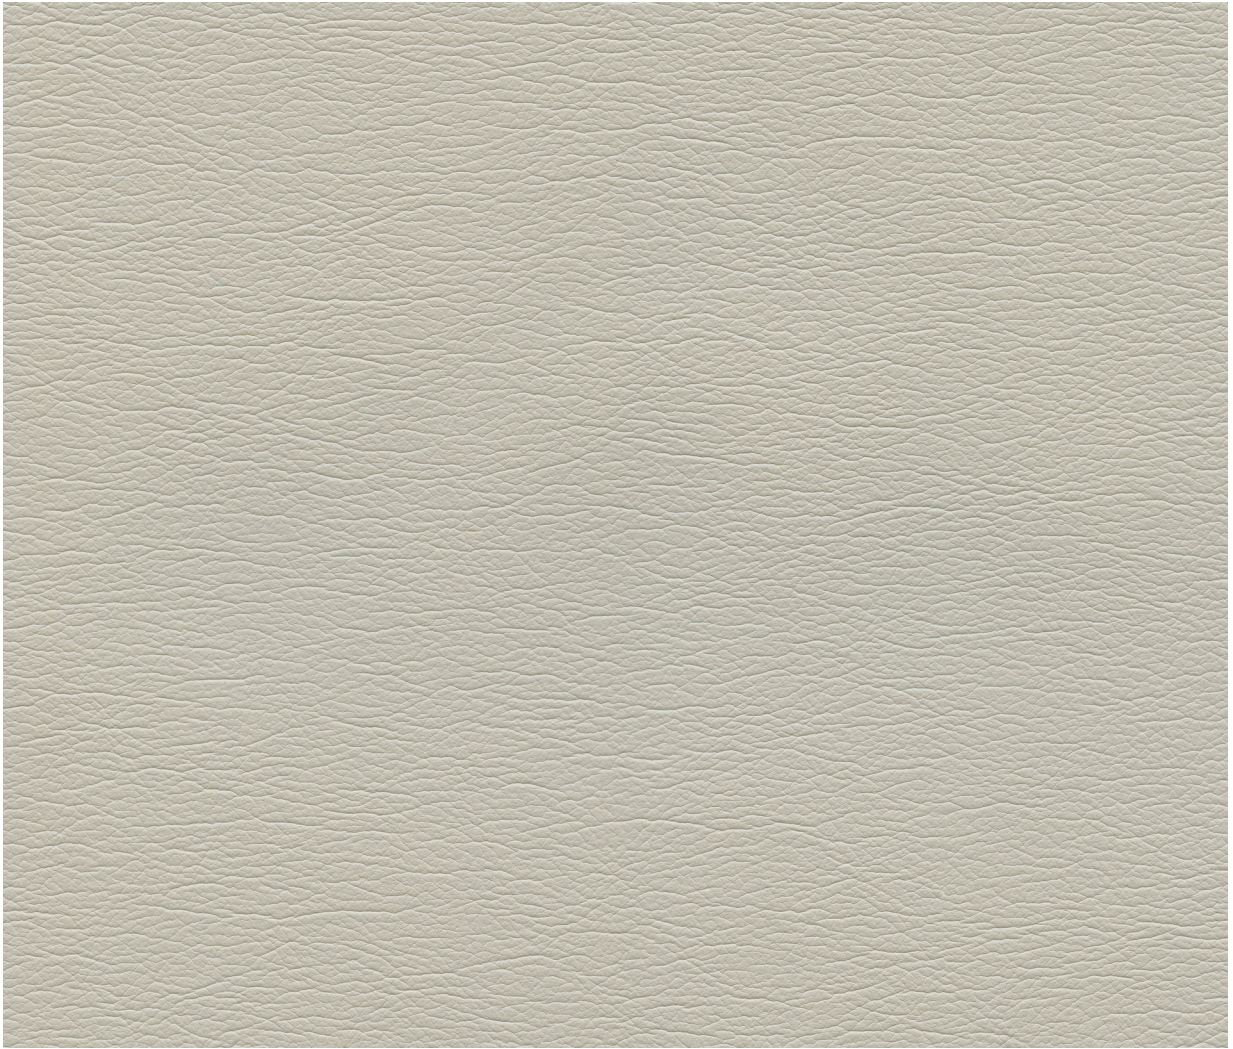

291-5684 Arctic



291-0001 White



291-5805 Ermine



291-5714 Ice



291-5668 Silver Pearl



291-5666 Dove Grey




291-5040 Elephant



291-5708 Granite



291-5763 Charcoal



291-5806 Schooner



291-5607 Raven Wing





291-3720 Light Oyster



291-3455 Milkweed



291-3599 Almond



291-3700 Ivory




291-5250 Sassy



291-3601 Doe



291-3609 Buff



291-3850 Sand



291-3719 Champagne



291-8243 Apricot



291-3729 Tan




291-3926 Cashmere



291-3851 Chamois



291-3778 Pecan



291-6588 Salmon




291-5676 Pelican



291-3183 Pine Cone



291-1256 Papyrus



291-8219 Adobe




291-8233 Autumn Leaf



291-3602 Stone



291-3523 Cave



291-3779 Taupe



291-3612 Curry



291-1347 Poppy



291-3777 Walnut



291-3666 Fudge



291-3205 Hot Chocolate



291-3610 Hide



291-1176 Red






291-7214 Boysenberry



291-9385 Plum



291-2552 Riviera



291-2527 Lagoon



291-5200 Citrus




291-1311 Brick



291-3469 Garnet



291-2685 Bayou



291-2553 Cyan



291-4460 Parrot




291-6580 Sorbet



291-2551 Baltic



291-2508 Rain Dance



291-2507 St. John



291-4454 Sonora



291-1334 Toro



291-2555 Nile



291-2509 Poseidon



291-4314 Herbal Mist



291-4430 Eucalyptus




291-1312 Chianti



291-2556 Admiral



291-2478 Diplomat Blue



291-4351 Shetland



291-4313 Sweetgrass



# Ultraleather from Ultrafabrics

## Application

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface

100% Reinforced Rayon Backing

### Weight:

Approx. 9.7 oz. Per Square Yard

Approx. 330 Grams Per Square Metre

### Thickness:

Approx. 0.95 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*

BS EN ISO 12947-2 / 180,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

## Colorfastness

Light Fastness: AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.

